


Properties of the product - 26 MPa „Solenoid-valve“

- Operating Pressure: 0-26 MPa
- Operating temperature: -40 °C up to 85 °C
- Reliable in fuelling and operating direction, noiseless
- Small construction
- Corrosion-resistant aluminum or brass, nickel plated
- All seals are suitable for CNG
- Certification: ECE R 110 is planned
- The valve is equivalent the heavy metal regulation
- Burst pressure: > 100 MPa, 20 °C
- Orifice diameter: 4, 6 mm
- Tightness: 1x10⁻⁵ mbar l/s, 20 °C, 100% He
- Optional fitting for 6, 8, 10, 12, 16 mm tube or 3/8"
- Incl. excess flow limiter
- Incl. manual valve
- Incl. TPRD, glassbulb 110 °C ±5 %, minimal release time, orifice 4, 6, 8 mm
- Incl. 12 V DC, 7 Watt coil or 24 V DC coil, AMP junior connector, superseal

Product samples: B21-0-XX

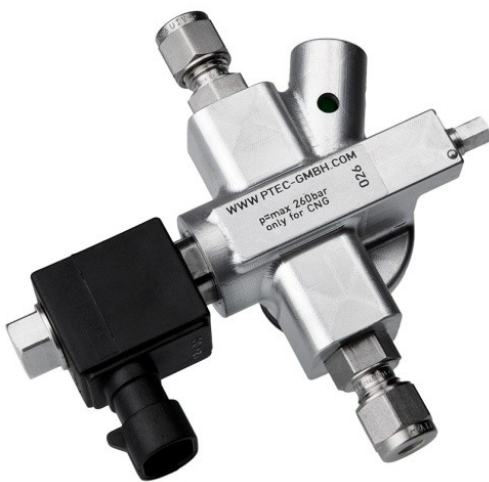

alu



brass, nickel plated